KOHLER® Power Systems

Residential Generators

14/20RESA

Model number	8.5RES	14RESA	20RESA	38RCL	48RCL	60ERESB	80ERESD	100ERESD	125ERESC	150ERESC
Rated Power LPG (Liquid Propane)/ NG (Natural Gas) (kW)	8.5/7.0	14/12	20/18	38/38	48/48	60/60	NA/80	95/100	113/125	134/144
Voltage @ 60 Hz	120/240	120/240	120/240	120/240	120/240	120/240	120/240	120/240	120/240	120/240
Amps LPG/NG @ 240 V	35/29	58/50	83/75	158/158	200/200	250/250	NA/333	396/417	469/521	557/600
Engine/Alternator RPM	3600	3600	3600	1800	1800	1800	1800	1800	1800	1800

Mobile Generators

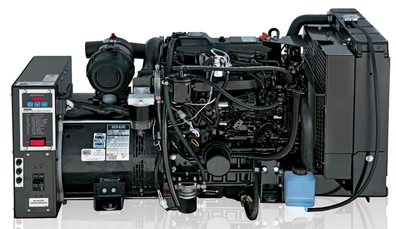
20EORDB

	Model	kW*	Hz	Ph
DIESEL	10EORZDB 9EFORZDB	10 9	60 50	1 1
DIESEL	15EORZDB 12.5EFORZDB	15 12.5	60 50	1 or 3 1 or 3
DIESEL	20EORZDB 16.5EFORZDB	20 16.5	60 50	1 or 3 1 or 3
DIESEL	30EORZDB 25EFORZDB	30 25	60 50	1 or 3 1 or 3
DIESEL	40EORZDB 33EFORZDB	40 33	60 50	1 or 3 1 or 3

Industrial Generators | Diesel

30REOZJC

500REOZJ

3250REOZD

MODEL	STANDBY 60 Hz (kW/kVA)	PRIME 60 Hz (kW/kVA)	RPM	EPA Emissions
10REOZDC	10/12.5	9/11.3	1800	Tier 4
15REOZDC	15/18.8	13.5/16.9	1800	Tier 4
20REOZDC	20/25	18/22.5	1800	Tier 4i
20REOZJC	27/34	24/30	1800	Tier 4i
30REOZJC	30/38	26/33	1800	Tier 4i
30REOZK4	30/33	28/35	1800	Tier 4
40REOZJC	40/50	38/48	1800	Tier 3
40REOZK4	40/50	36/45	1800	Tier 4
50REOZJD	51/64	47/59	1800	Tier 3
60REOZJD	62/78	56/70	1800	Tier 3
80REOZJF	83/104	76/95	1800	Tier 3
100REOZJF	102/128	92/115	1800	Tier 3
125REOZJG	128/160	116/145	1800	Tier 3
150REOZJF	154/193	140/175	1800	Tier 3
180REOZJG	180/225	165/206	1800	Tier 3
200REOZJF	200/250	180/225	1800	Tier 3
230REOZJE	230/288	205/256	1800	Tier 3
250REOZJE	255/319	230/288	1800	Tier 3
275REOZJE	280/350	255/319	1800	Tier 3
300REOZJ	300/375	-	1800	Tier 3
350REOZJB	350/438	-	1800	Tier 3
400REOZJB	400/500	-	1800	Tier 3
500REOZJB	500/625	-	1800	Tier 2
500REOZVC	515/644	460/575	1800	Tier 2
550REOZVB	550/688	500/625	1800	Tier 2
600REOZVB	600/750	555/694	1800	Tier 2

MODEL	STANDBY 60 Hz (kW/kVA)	PRIME 60 Hz (kW/kVA)	RPM	EPA Emissions
700REOZDE	700/785	630/788	1800	Tier 2
800REOZDE	800/1000	725/906	1800	Tier 2
900REOZDE	910/1136	830/1038	1800	Tier 2
1000REOZDE	1000/1250	910/1138	1800	Tier 2
1250REOZDD	1300/1625	1180/1475	1800	Tier 2
1250ROZMC	1280/1600	1160/1450	1800	-
1250REOZMD	1280/1600	1160/1450	1800	Tier 2
1500REOZDD	1560/1950	1400/1750	1800	Tier 2
1600ROZMC	1600/2000	1450/1813	1800	-
1600REOZMD	1600/2000	1450/1813	1800	Tier 2
1750REOZDC	1760/2200	1600/2000	1800	Tier 2
1750REOZMD	1780/2225	1620/2025	1800	Tier 2
2000REOZDD	2060/2575	1850/2313	1800	Tier 2
2000ROZMC	2000/2500	1820/2275	1800	-
2000REOZMD	2000/2500	1820/2275	1800	Tier 2
2250REOZDD	2250/2813	2050/2563	1800	Tier 2
2500REOZDB	2500/3125	2270/2838	1800	Tier 2
2800REOZDB	2800/3500	2540/3175	1800	Tier 2
3250REOZD	3250/3500	2800/3500	1800	Tier 2

1) Stationary emergency ratings based on 3-phase, 480 V

2) 50 Hz non-emissions models are also available. Please contact the factory

3) Single-phase ratings also available

For additional technical specifications, visit KohlerPower.com

Industrial Generators | Gas

25REZGC

125REZGC

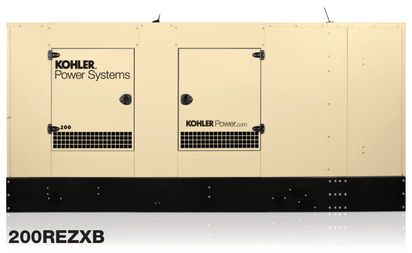

200REZXB

MODEL	NG STANDBY 60 Hz (kW/kVA)	LP STANDBY 60 Hz (kW/kVA)	NG PRIME 60 Hz (kW/kVA)	RPM	Emissions
25REZG	25/31	25/31	-	1800	EPA-certified
30REZG	30/38	30/38	-	1800	EPA-certified
40REZG	39/49	40/50	-	1800	EPA-certified
45REZG	42/53	45/56	-	1800	EPA-certified
50REZGB	53/66	55/69	-	1800	EPA-certified
60REZGB	60/75	64/80	-	1800	EPA-certified
80REZGD	80/100	-	-	1800	EPA-certified
100REZGD	100/125	100/125	-	1800	EPA-certified
125REZGC	128/160	106/133	-	1800	EPA-certified
150REZGC	150/188	139/174	-	1800	EPA-certified
180REZXB	190/238	130/163	164/205	1800	EPA-certified
180RZXB	190/238	130/163	164/205	1800	-
200REZXB	200/250	130/163	175/219	1800	EPA-certified
200RZXB	200/250	130/163	174/219	1800	-
250REZXB	260/ 325	170/213	235/294	1800	EPA-certified
250RZXB	260/325	175/219	235/294	1800	-
300REZXB	300/375	210/263	270/338	1800	EPA-certified
300RZXB	300/375	210/263	270/338	1800	-
350REZXB	355/444	240/300	300/375	1800	EPA-certified
350RZXB	355/444	240/300	300/375	1800	-
400REZXB	400/500	260/325	360/450	1800	EPA-certified
400RZXB	400/500	260/325	360/450	1800	-

1) Stationary emergency ratings based on 3-phase, 480 V

2) 50 Hz non-emissions models are also available. Please contact the factory

3) Single-phase ratings also available

For additional technical specifications, visit KohlerPower.com

Industrial Generators | Towables

125REZGT

	DIESEL						LP/NG	DIESEL		
MODEL SPECIFICATIONS	20REOZT	35REOZT4	40REOZT	45REOZT4	60REOZT	100REOZT	125REZGT	150REOZT	200REOZT	500REOZT
Standby rating @ 480 V (kW/kVA)	22/28	30/37.5	38/48	40/50	65/81	105/131	105/131	155/194	210/263	510/638
Prime rating @ 480 V (kW/kVA)	20/25	28/35	35/44	36/45	59/74	96/120	100/125	140/175	190/238	460/575
EPA Emissions	Tier 4i	Tier 4F	Tier 4i	Tier 4F	Tier 3	Tier 3	EPA Certified	Tier 3	Tier 3	Tier 2

Automatic Transfer Switches

SERVICE ENTRANCE ATS

STANDARD ATS

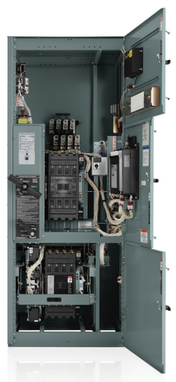
BYPASS ISOLATION ATS

MODEL	MECHANISM	TRANSITION	AMPERAGE
KSS	Standard	Open	40-1000A
KSP	Standard	Programmed	100-600A
KCS	Standard	Open	30-4000A
KCP	Standard	Programmed	150-4000A
KCC	Standard	Closed	150-4000A
KBS	Bypass Isolation	Open	150-4000A
KBP	Bypass Isolation	Programmed	150-4000A
KBC	Bypass Isolation	Closed	150-4000A
KGS	Bypass Isolation	Open	150-3000A
KGP	Bypass Isolation	Programmed	150-3000A
KEP	Service Entrance	Programmed	100-4000A

Paralleling Switchgear

PD-2000

MODEL	MAXIMUM VOLTAGE	SHORT-CIRCUIT RATING	BUS RATING
PD-2000	600V	150kA	10,000A
PD-3000	600V	200kA	9,200A
PD-4000	15kV	200kA	6,000A

Marine Generators

5EKD

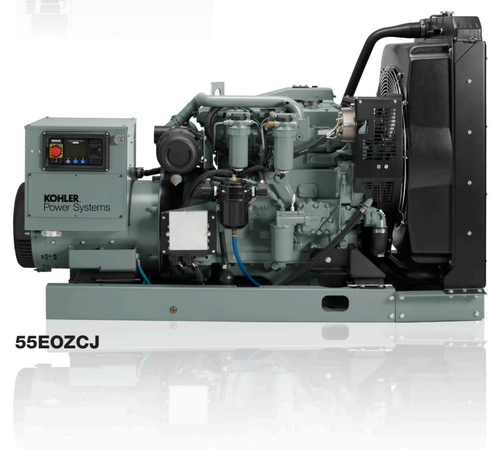

55EOZCJ

	Model	kW*	Hz	RPM	Ph
GASOLINE	5EKD 4EFKD	5.0 4.0	60 50	3600 3000	1
GASOLINE	7.5EKD 6EFKD	7.5 6.0	60 50	3600 3000	1
GASOLINE	10EKD 8EFKD	10.0 8.0	60 50	3600 3000	1
GASOLINE	10EGD 9EFGD	10.0 9.0	60 50	1800 1500	1
GASOLINE	13EGD 11EFGD	13.0 11.0	60 50	1800 1500	1
GASOLINE	15EGD	14.0	60	1800	1
GASOLINE	15EGZD***	14.0	60	1800	1
DIESEL	6EKOD 5EFKOD	6.0 5.0	60 50	1800 1500	1
DIESEL	9EKOZD 7EFKOZD	8.5 7.0	6050	1800 1500	1
DIESEL	11EKOZD 9EFKOZD	11.0 9.0	60 50	1800 1500	1 or 3
DIESEL	13EOZD 11EFOZD	13.0 11.0	60 50	1800 1500	1

	Model	kW*	Hz	RPM	Ph
DIESEL	14EOZD 11.5EFOZD	14.0 11.5	60 50	1800 1500	3
DIESEL	15EOZD 13EFOZD	15.0 13.0	60 50	1800 1500	1
DIESEL	20EOZD 17EFOZD	20.0 17.0	60 50	1800 1500	1
DIESEL	20EOZD 17.5EFOZD	20.0 17.5	60 50	1800 1500	3
DIESEL	23EOZD 20EFOZD	23.0 20.0	60 50	1800 1500	1
DIESEL	24EOZD 20EOZD	24.0 20.0	60 50	1800 1500	3
DIESEL	28EOZD 25EFOZD	28.0 25.0	60 50	1800 1500	1 or 3
DIESEL	32EOZD 28EFOZD	32.0 28.0	60 50	1800 1500	1 or 3
DIESEL	32EOZD 28EFOZD	32.0 28.0	60 50	1800 1500	1 or 3

	Model	kW*	Hz	RPM	Ph
DIESEL	40EOZDJ 33EFOZDJ	40.0 33.0	60 50	1800 1500	1 or 3
DIESEL	40EFOZDJ	40.0	50	1500	3
DIESEL	55EOZDJ 45EFOZDJ	55.0 40.0	60 50	1800 1500	1 or 3
DIESEL	50EFOZDJ	50.0	50	1500	3
DIESEL	65EOZDJ 55EFOZDJ	65.0 50.0	60 50	1800 1500	1 or 3
DIESEL	80EOZDJ 70EFOZDJ	80.0 70.0	60 50	1800 1500	3
DIESEL	99EOZDJ 80EFOZDJ	99.0 80.0	60 50	1800 1500	3
DIESEL	125EOZD 100EFOZD	125.0 99.0	60 50	1800 1500	3
DIESEL	150EOZD 125EFOZD	150.0 125.0	60 50	1800 1500	3
DIESEL	180EOZD 150EFOZD	180.0 150.0	60 50	1800 1500	3

	Model	kW*	Hz	RPM	Ph
DIESEL	40EOZCJ 33EFOZCJ	40.0 33.0	60 50	1800 1500	3
DIESEL	55EOZCJ 45EFOZCJ	55.0 40.0	60 50	1800 1500	3
DIESEL	40EFOZCJ	40.0	50	1500	3
DIESEL	65EOZCJ 55EFOZCJ	65.0 50.0	60 50	1800 1500	3
DIESEL	50EFOZCJ	50.0	50	1500	3
DIESEL	80EOZCJ 70EFOZCJ	80.0 70.0	60 50	1800 1500	3
DIESEL	99EOZCJ 80EFOZCJ	99.0 80.0	60 50	1800 1500	3
DIESEL	125EOZC 100EFOZC	125.0 99.0	60 50	1800 1500	3
DIESEL	150EOZC 125EFOZC	150.0 125.0	60 50	1800 1500	3
DIESEL	180EOZC 150EFOZC	180.0 150.0	60 50	1800 1500	3

* kW rating varies by voltage. Consult the generator spec sheet for more detail.
** Standby 125 degree C/25 degree C rating
***Features rear PTO adapter.
"T" in cylinder column stands for "turbocharger"

KohlerPower.com
800-544-2444

G18-230 (4/14)